


Victor

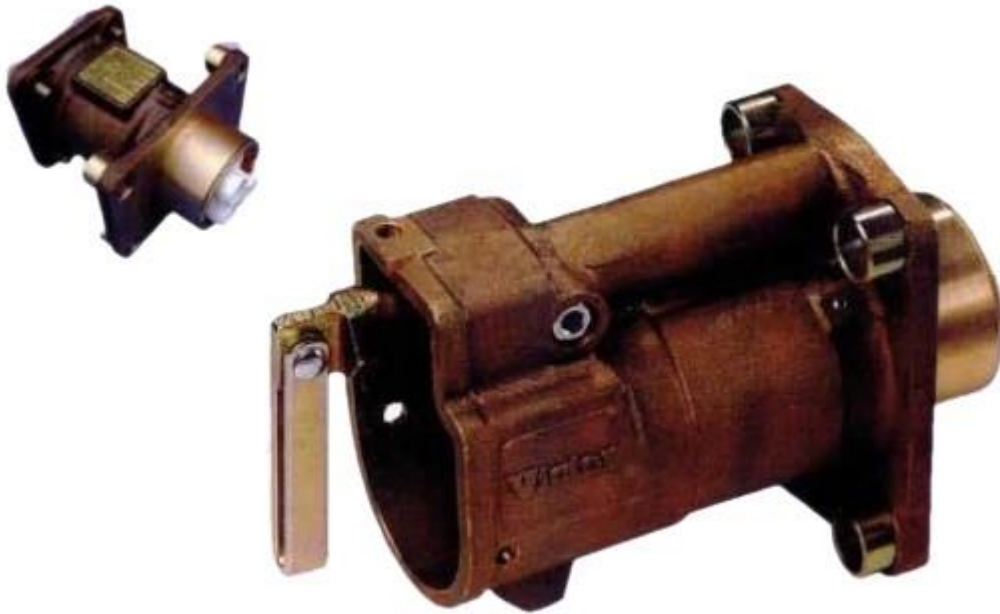

SPECIFICATION

- ▼ Provision of 3 power, 1 pilot contact with scraping earth.
- ▼ Current rating – 250 Amps.
- ▼ Voltage – 650 / 1300 Volts.
- ▼ Weight – 9 kgs.
- ▼ Bolted version shown in smaller image.

STANDARDS & CERTIFICATION

EN 50014: 1997 + Amds 1 & 2
and EN 50018: 2000

Certificate No. MECS02ATEX5102U (SR)

Certificate No. MECS02ATEX5097U (SB)

 I M2 EEx d I

FEATURES & BENEFITS


- ▼ Minimal spares stockholding.
- ▼ Compact size and weight.
- ▼ Simple serviceable design.
- ▼ To Facilitate the connection of trailing cables, fitted with suitable mating Type A41 plugs.
- ▼ Suitable for deep mine and opencast environments.
- ▼ Electrical interlock by means of the pilot circuit is an essential part of the Group 1 classification.
- ▼ Ideally suited to joining short runs of cable which are prone to mechanical damage.

For more information on possible variants please contact Victor Sales:
Tel: 0191 280 8000, Email: sales@victor.co.uk



Victor

VICTOR PRODUCTS LIMITED

Unit 3A, Tyne dock East Side, Port of Tyne, South Shields NE33 5SQ United Kingdom
Tel: 0191 280 8000, Fax: 0191 280 8080 Email: sales@victor.co.uk Web: www.victor.co.uk
A Federal  Signal Company

LEAFLET NO. DS020 REV 0 03/24

Type A41SR / 41SB 650 / 1300V 250A Restrained & Bolted Socket