


A
B
C
D
E
F
G
H

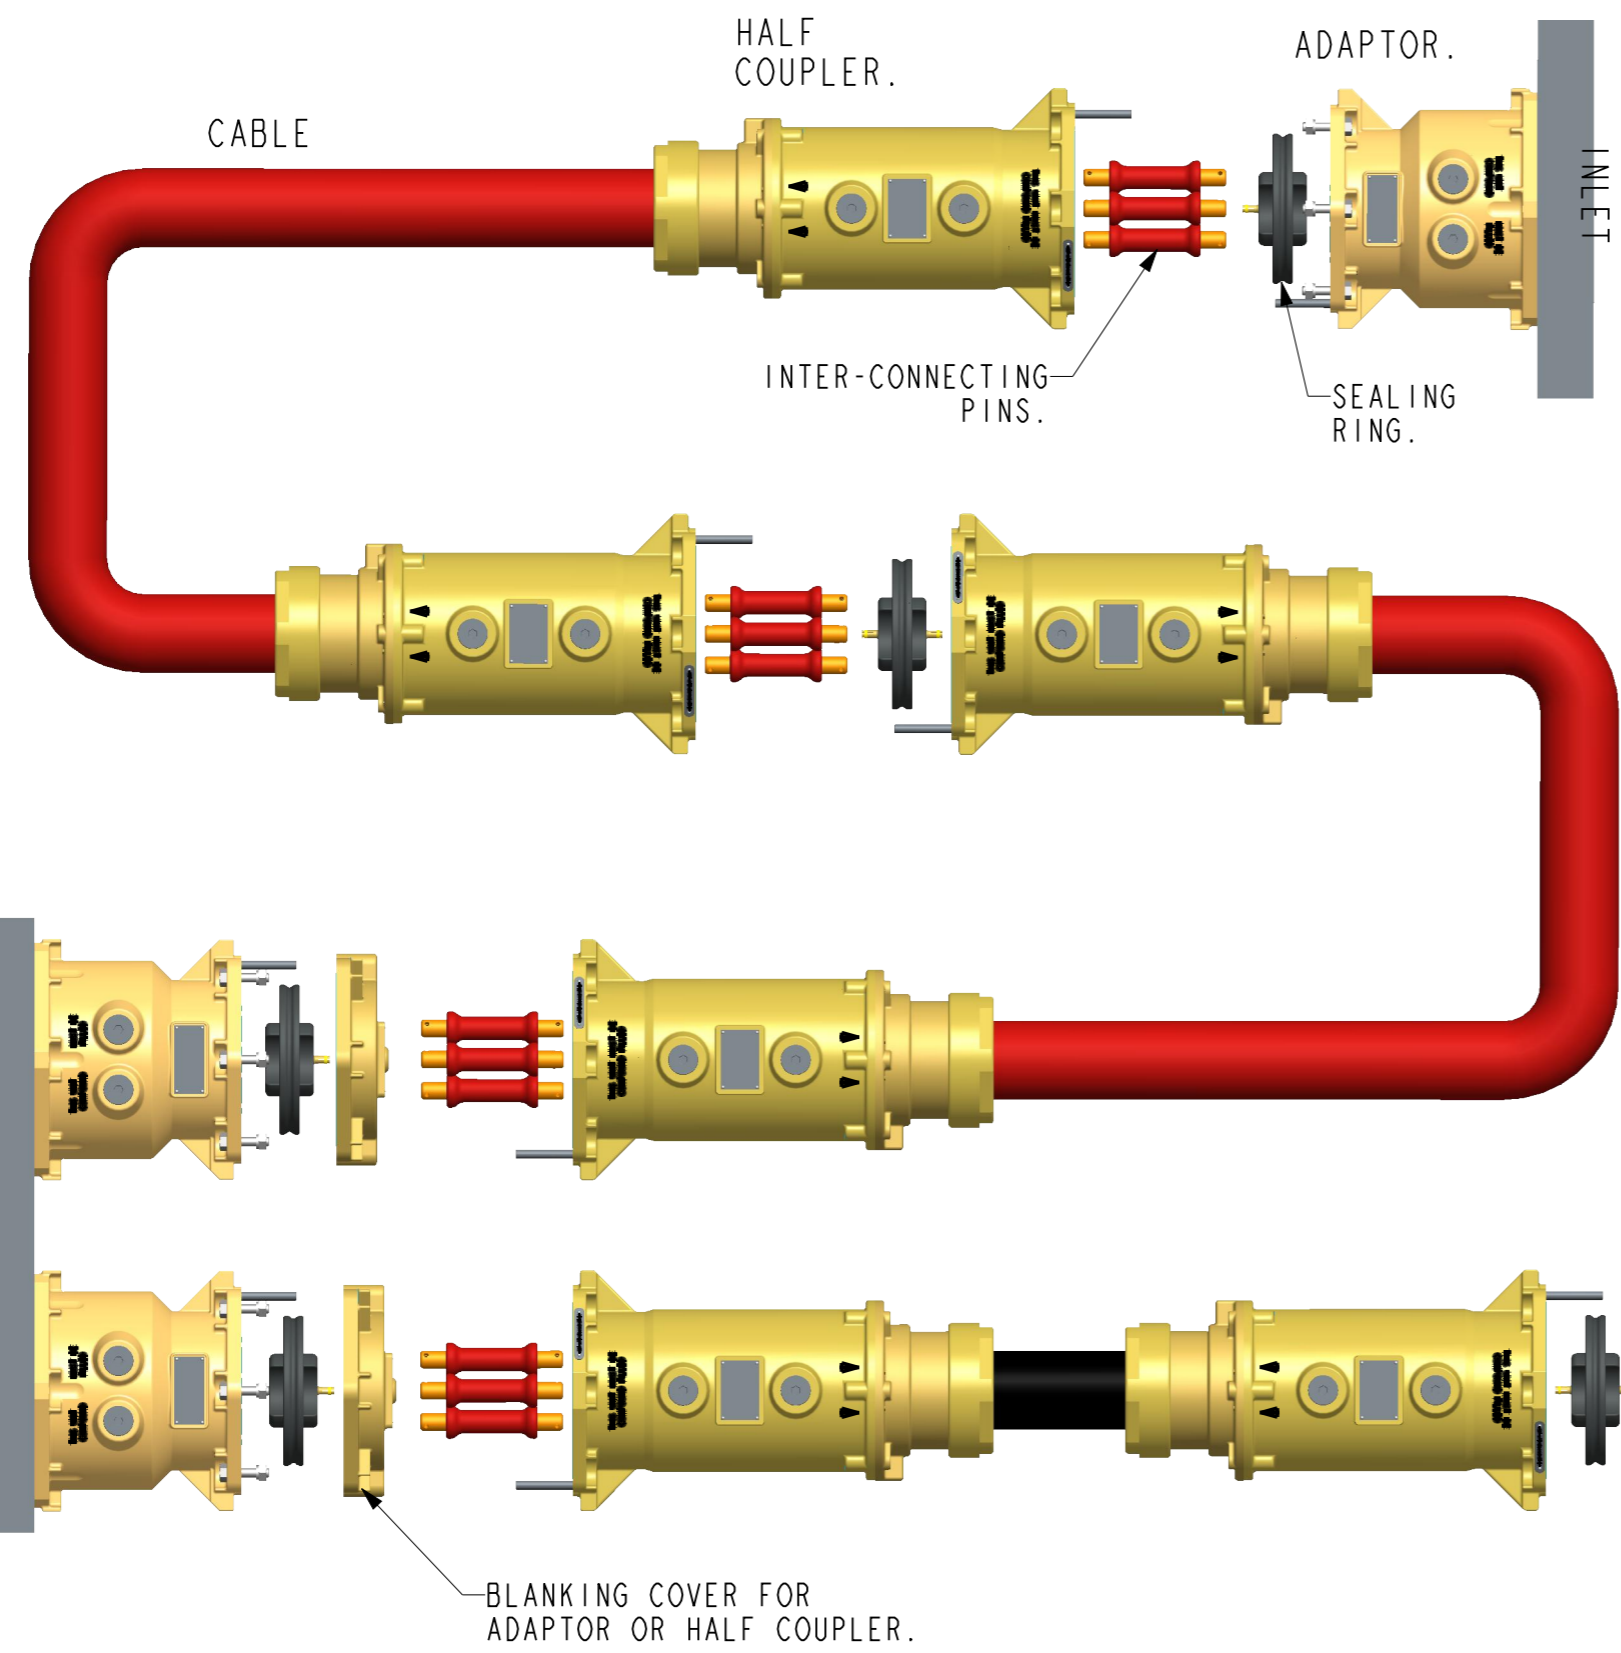

ALL UNITS MUST BE FULLY FILLED WITH RESIN GPC18-1.

11kV RANGE SHOWN WITH GLANDS SUITABLE FOR USE WITH TRAILING CABLE. LAYOUT IS TYPICAL FOR OTHER VOLTAGE MODES.

DRAWING No.	ISSUE No.
CP324	
CERTIFICATE RELATED DRAWING	
NO MODIFICATIONS PERMITTED WITHOUT THE APPROVAL OF THE TECHNICAL MANAGER	
DO NOT SCALE	
DIMENSIONS IN MILLIMETRES (mm)	
MAXIMUM MACHINED SURFACE	
TEXTURE $\mu\text{m Ra } 3.2$	
MACHINE WHERE MARKED THUS <input checked="" type="checkbox"/>	
ANGULAR TOLERANCES $\pm 1/2^\circ$	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE STATED	
UPTO 6	± 0.1
OVER 6 UPTO 30	± 0.2
OVER 30 UPTO 100	± 0.3
OVER 100 UPTO 300	± 0.5
OVER 300	± 0.8
TEST No.	PROCESS No.
200	---
DRAWN	AER
DATE	20/12/11
CHECKED	20/12/11 AER
APPROVED	20/12/11 AER
SCALE	1:8


DCR	DRN	20/12/11	AER
CHK	AER	APP	20/12/11
DRAWING INTRODUCED.			

TYPICAL LAYOUT USING HALF COUPLERS, ADAPTORS & BLANKING COVER.

Victor Victor Products Limited
New York Way,
Newcastle upon Tyne,
NE27 0QF, United Kingdom.

DRAWING No.	ISSUE No.
SHEET 1 OF 2	
CP324	

DRAWING No.	ISSUE No.
CP324	0



CERTIFICATE RELATED DRAWING

NO MODIFICATIONS PERMITTED WITHOUT THE APPROVAL OF THE TECHNICAL MANAGER

DO NOT SCALE

DIMENSIONS IN MILLIMETRES (mm)
 MAXIMUM MACHINED SURFACE
 TEXTURE $\mu m Ra 3.2$
 MACHINE WHERE MARKED THUS

ANGULAR TOLERANCES $\pm 1/2^\circ$

DIMENSIONAL TOLERANCES UNLESS OTHERWISE STATED

UPTO 6	± 0.1
OVER 6 UPTO 30	± 0.2
OVER 30 UPTO 100	± 0.3
OVER 100 UPTO 300	± 0.5
OVER 300	± 0.8

TEST No.	PROCESS No.
----------	-------------

200	---
-----	-----

DRAWN	AER
-------	-----

DATE	14/4/13
------	---------

CHECKED	14/4/13 AER
---------	-------------


APPROVED	14/4/13 HD
----------	------------

SCALE	1:8
-------	-----

DRAWING No.	ISSUE No.
SHEET 2 OF 2	


CP324	0
-------	---

ADAPTOR
 3 CONNECTING PINS AND 1 SEALING RING PER JOINT.
 HALF COUPLER.
 CABLE.
 HALF COUPLER.




LAYOUT 1.

THIS END TO BE CONNECTED TO AN ADAPTOR OR ANOTHER HALF COUPLER.



LAYOUT 2.

THIS END TO BE CONNECTED TO AN ADAPTOR OR ANOTHER HALF COUPLER.



LAYOUT 3.

THIS END TO BE CONNECTED TO AN ADAPTOR OR ANOTHER HALF COUPLER.

LAYOUT.	HALF COUPLERS.	ADAPTORS.	TOTAL UNITS.	No. JOINTS	SETS OF 3 CONTACT PINS & 1 SEALING RING.
LAYOUT 1.	14	2	16	8	8
LAYOUT 2.	10	2	12	6	6
LAYOUT 3.	4	2	6	3	3

DCR	DRN	15/4/13	AER
CHK	15/4/13	AER	APP
		15/4/13	HD

DRAWING INTRODUCED.

TYPICAL EXAMPLES OF ADAPTOR AND HALF COUPLER LAYOUTS.

Victor Victor Products Limited
 New York Way,
 Newcastle upon Tyne,
 NE27 0QF, United Kingdom.